

**BULLETIN PE**



Effective November 1, 1999  
Supersedes all previous Pittman Express Catalogs.



**PITTMAN**<sup>®</sup>  
Power Your Ideas<sup>™</sup>

## **Welcome to Pittman Express™**

The Pittman Express™ program lets you choose from a selection of over 100 quality Pittman motors. Pittman Express offers you a convenient source of quality products that can be ordered and shipped immediately. This catalog contains performance specifications and drawings, with data provided in both english and metric units.

To order a motor from the Pittman Express™ program, find the motor type you require, then determine the specific part number that meets your speed, torque and physical specifications. When you call us to place your order, just provide us with the motor part number and quantity you need.

Next-day shipment, direct from Pittman, is standard for all Pittman Express motors. Same-day shipment is also available upon request when you place an order by 3:00 PM EST, Monday through Friday. Pittman Express orders are limited to a maximum of five pieces per motor type. All shipping charges are extra.

The program includes a wide variety of motor configurations, including brush-commutated DC motors and gearmotors, and brushless DC motors. Modifications to Pittman Express motors including other brush materials, encoder resolutions, and EMI/RFI suppression networks are available in days. Most Pittman Express motors are made with quality materials such as precision ball bearings and premium gears. Most motor-encoder combinations feature Hewlett Packard® HEDS-9140, 3-channel encoders. All motors, gearmotors and encoders are dynamically tested to verify critical operating parameters.

For additional information on the Pittman Express program, or any Pittman product, please contact us.

Phone: 215-256-6601

877-748-8626 (Toll Free)

Fax: 215-256-1338

Email: [info@pittmannel.com](mailto:info@pittmannel.com)

Web site: [www.pittmannel.com](http://www.pittmannel.com)



**Series 8000 LO-COG® Brush Commutated DC Motors**

Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω Ω	mH mH	V V			
1.58 (.011)	7847 (821.7)	7.4 (.052)	1.94 (0.014)	1.43 (0.014)	3.1 3.1	1.57 1.57	12 12	500 CPR 500 CPR	PE-4 PE-4	8322S001 8322S001
1.58 (.011)	7847 (821.7)	7.4 (.052)	3.88 (0.027)	2.87 (0.027)	12.1 12.1	6.27 6.27	24 24	None None	PE-4 PE-4	8322S002 8322S002
1.58 (.011)	7847 (821.7)	7.4 (.052)	3.88 (0.027)	2.87 (0.027)	12.1 12.1	6.27 6.27	24 24	500 CPR 500 CPR	PE-4 PE-4	8322S003 8322S003
1.58 (.011)	7847 (821.7)	7.4 (.052)	1.94 (0.014)	1.43 (0.014)	3.1 3.1	1.57 1.57	12 12	None None	PE-4 PE-4	8322S008 8322S008
2.62 (.019)	10158 (1063.7)	16.8 (.118)	1.54 (0.011)	1.14 (0.011)	1.17 1.17	0.58 0.58	12 12	None None	PE-4 PE-4	8324S004 8324S004
2.62 (.019)	10158 (1063.7)	16.8 (.118)	1.54 (0.011)	1.14 (0.011)	1.17 1.17	0.58 0.58	12 12	500 CPR 500 CPR	PE-4 PE-4	8324S005 8324S005
2.62 (.019)	10158 (1063.7)	16.8 (.118)	3.09 (0.022)	2.29 (0.022)	4.33 4.33	2.34 2.34	24 24	None None	PE-4 PE-4	8324S006 8324S006
2.62 (.019)	10158 (1063.7)	16.8 (.118)	3.09 (0.022)	2.29 (0.022)	4.33 4.33	2.34 2.34	24 24	500 CPR 500 CPR	PE-4 PE-4	8324S007 8324S007

**Series 9000 LO-COG® Brush Commutated DC Motors**

Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω Ω	mH mH	V V			
2.3 (.016)	7015 (734.6)	13.8 (.097)	2.2 (0.016)	1.63 (0.016)	1.93 1.93	1.16 1.16	12 12	500 CPR 500 CPR	PE-5 PE-5	9232S001 9232S001
2.3 (.016)	7015 (734.6)	13.8 (.097)	4.4 (0.031)	3.25 (0.031)	7.38 7.38	4.64 4.64	24 24	None None	PE-5 PE-5	9232S002 9232S002
2.3 (.016)	7015 (734.6)	13.8 (.097)	4.4 (0.031)	3.25 (0.031)	7.38 7.38	4.64 4.64	24 24	500 CPR 500 CPR	PE-5 PE-5	9232S003 9232S003
4.7 (.033)	5993 (627.6)	31.6 (.223)	2.67 (0.019)	1.98 (0.019)	1.08 1.08	0.84 0.84	12 12	None None	PE-5 PE-5	9233S012 9233S012
4.7 (.033)	5993 (627.6)	31.6 (.223)	5.28 (0.037)	3.9 (0.037)	3.94 3.94	3.29 3.29	24 24	None None	PE-5 PE-5	9233S013 9233S013
6.1 (.043)	6151 (644.1)	41.3 (.291)	2.58 (0.018)	1.91 (0.018)	0.83 0.83	0.63 0.63	12 12	None None	PE-5 PE-5	9234S004 9234S004
6.1 (.043)	6151 (644.1)	41.3 (.291)	2.58 (0.018)	1.91 (0.018)	0.83 0.83	0.63 0.63	12 12	500 CPR 500 CPR	PE-5 PE-5	9234S005 9234S005
6.1 (.043)	6151 (644.1)	41.3 (.291)	5.17 (0.037)	3.82 (0.037)	2.96 2.96	2.51 2.51	24 24	None None	PE-5 PE-5	9234S006 9234S006
6.1 (.043)	6151 (644.1)	41.3 (.291)	5.17 (0.037)	3.82 (0.037)	2.96 2.96	2.51 2.51	24 24	500 CPR 500 CPR	PE-5 PE-5	9234S007 9234S007
9.5 (.067)	4913 (514.5)	61.8 (.436)	6.49 (0.046)	4.8 (0.046)	2.49 2.49	2.63 2.63	24 24	None None	PE-5 PE-5	9236S008 9236S008
9.5 (.067)	4913 (514.5)	61.8 (.436)	6.49 (0.046)	4.8 (0.046)	2.49 2.49	2.63 2.63	24 24	500 CPR 500 CPR	PE-5 PE-5	9236S009 9236S009
11.5 (.081)	5331 (558.3)	77 (.543)	6 (0.042)	4.44 (0.042)	1.85 1.85	1.97 1.97	24 24	None None	PE-5 PE-5	9237S010 9237S010
11.5 (.081)	5331 (558.3)	77 (.543)	6 (0.042)	4.44 (0.042)	1.85 1.85	1.97 1.97	24 24	500 CPR 500 CPR	PE-5 PE-5	9237S011 9237S011


Note: All encoders supplied with 20" lead wires.

**Series 14000 LO-COG® Brush Commutated DC Motors**

Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω Ω	mH mH	V V			
10 (.071)	4230 (443.0)	62.8 (.444)	3.72 (0.026)	2.75 (0.026)	0.72 0.72	0.63 0.63	12 12	500 CPR 500 CPR	PE-5 PE-5	14201S001 14201S001
10 (.071)	4230 (443.0)	62.8 (.444)	7.44 (0.053)	5.5 (0.053)	2.79 2.79	2.54 2.54	24 24	None None	PE-5 PE-5	14201S002 14201S002
10 (.071)	4230 (443.0)	62.8 (.444)	7.44 (0.053)	5.5 (0.053)	2.79 2.79	2.54 2.54	24 24	500 CPR 500 CPR	PE-5 PE-5	14201S003 14201S003
21 (.148)	3456 (361.9)	159 (1.12)	9.26 (0.065)	6.85 (0.065)	1.38 1.38	2.26 2.26	24 24	None None	PE-5 PE-5	14203S009 14203S009
21 (.148)	3456 (361.9)	159 (1.12)	4.63 (0.033)	3.42 (0.033)	0.37 0.37	0.56 0.56	12 12	None None	PE-5 PE-5	14203S010 14203S010
26 (.184)	3702 (387.7)	204 (1.44)	4.33 (0.031)	3.21 (0.031)	0.27 0.27	0.4 0.4	12 12	500 CPR 500 CPR	PE-5 PE-5	14204S004 14204S004
26 (.184)	3702 (387.7)	204 (1.44)	8.67 (0.061)	6.41 (0.061)	1.01 1.01	1.6 1.6	24 24	None None	PE-5 PE-5	14204S005 14204S005
26 (.184)	3702 (387.7)	204 (1.44)	8.67 (0.061)	6.41 (0.061)	1.01 1.01	1.6 1.6	24 24	500 CPR 500 CPR	PE-5 PE-5	14204S006 14204S006
36.5 (.258)	3216 (336.8)	284 (2.01)	10 (0.071)	7.39 (0.071)	0.84 0.84	1.36 1.36	24 24	None None	PE-5 PE-5	14206S011 14206S011
50 (.35)	3211 (336.3)	410 (2.90)	10 (0.071)	7.39 (0.071)	0.59 0.59	0.87 0.87	24 24	None None	PE-5 PE-5	14207S007 14207S007
50 (.35)	3211 (336.3)	410 (2.90)	10 (0.071)	7.39 (0.071)	0.59 0.59	0.87 0.87	24 24	500 CPR 500 CPR	PE-5 PE-5	14207S008 14207S008

Note: All encoders supplied with 20" lead wires.

**Series 8000 LO-COG® Brush Commutated DC Motors**

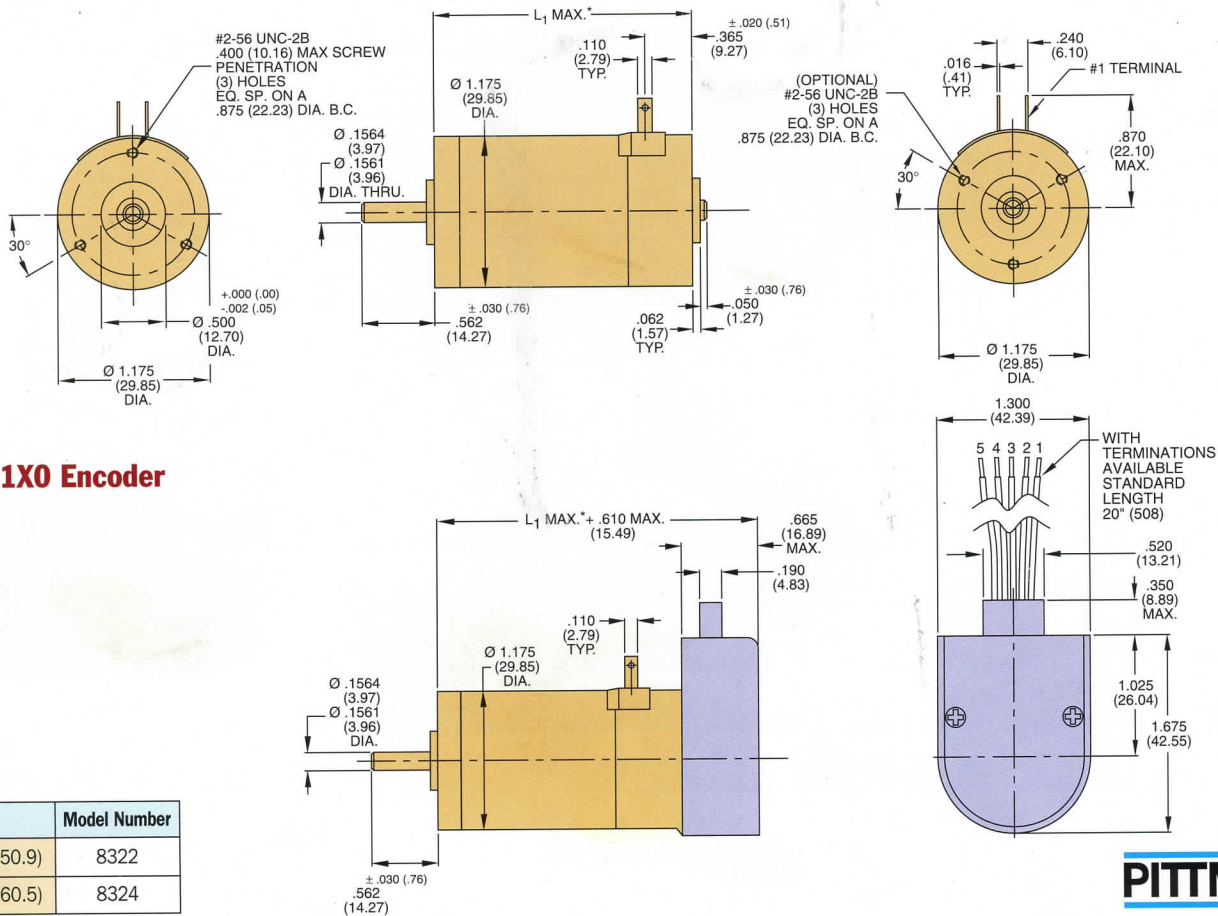



**Series GM 8000 LO-COG® Brush Commutated DC Motors**

Reduction Ratio	Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
	oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω	mH	V			
6.3:1	6	1227	26 <sup>1</sup>	3.06	2.27	10.8	5.4	19.1	None	PE-9	GM8712-11
6.3:1	(.04)	(128.5)	(.184)	(0.022)	(0.022)	10.8	5.4	19.1	None	PE-9	GM8712-11
19.5:1	6.18	396	72 <sup>1</sup>	3.06	2.27	10.8	5.4	19.1	None	PE-9	GM8712-21
19.5:1	(.119)	(41.5)	(.51)	(0.022)	(0.022)	10.8	5.4	19.1	None	PE-9	GM8712-21
60.5:1	46	128	201 <sup>1,2</sup>	3.06	2.27	10.8	5.4	19.1	None	PE-9	GM8712-31
60.5:1	(.325)	(13.4)	(1.42)	(0.022)	(0.022)	10.8	5.4	19.1	None	PE-9	GM8712-31
187.0:1	100	41	557 <sup>1,2</sup>	3.06	2.27	10.8	5.4	19.1	None	PE-9	GM8712-41
187.0:1	(.71)	(4.3)	(3.93)	(0.022)	(0.022)	10.8	5.4	19.1	None	PE-9	GM8712-41
187.0:1	100	41	557 <sup>1,2</sup>	3.87	2.86	17.2	8.62	24	None	PE-9	GM8712S030
187.0:1	(.71)	(4.3)	(3.93)	(0.027)	(0.027)	17.2	8.62	24	None	PE-9	GM8712S030
6.3:1	14.5	1440	42 <sup>1</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S008 <sup>3</sup>
6.3:1	(.102)	(150.8)	(.297)	(0.022)	(0.022)	4.33	2.34	12	None	PE-9	GM8724S008 <sup>3</sup>
6.3:1	14.5	1440	42 <sup>1</sup>	3.09	2.29	4.33	2.34	12	500 CPR	PE-9	GM8724S009 <sup>3</sup>
6.3:1	(.102)	(150.8)	(.297)	(0.022)	(0.022)	4.33	2.34	12	500 CPR	PE-9	GM8724S009 <sup>3</sup>
6.3:1	14.5	1440	42 <sup>1</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S010 <sup>3</sup>
6.3:1	(.102)	(150.8)	(.297)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S010 <sup>3</sup>
6.3:1	14.5	1440	42 <sup>1</sup>	6.18	4.57	17	9.35	24	500 CPR	PE-9	GM8724S011 <sup>3</sup>
6.3:1	(.102)	(150.8)	(.297)	(0.044)	(0.044)	17	9.35	24	500 CPR	PE-9	GM8724S011 <sup>3</sup>
9.9:1	21	910	60 <sup>1</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S012 <sup>3</sup>
9.9:1	(.148)	(95.3)	(.424)	(0.022)	(0.022)	4.33	2.34	12	None	PE-9	GM8724S012 <sup>3</sup>
9.9:1	21	910	60 <sup>1</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S013 <sup>3</sup>
9.9:1	(.148)	(95.3)	(.424)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S013 <sup>3</sup>
19.5:1	41.5	460	117 <sup>1</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S014 <sup>3</sup>
19.5:1	(.293)	(48.2)	(.826)	(0.022)	(0.022)	4.33	2.34	12	None	PE-9	GM8724S014 <sup>3</sup>
19.5:1	41.5	460	117 <sup>1</sup>	3.09	2.29	4.33	2.34	12	500 CPR	PE-9	GM8724S015 <sup>3</sup>
19.5:1	(.293)	(48.2)	(.826)	(0.022)	(0.022)	4.33	2.34	12	500 CPR	PE-9	GM8724S015 <sup>3</sup>
19.5:1	41.5	460	117 <sup>1</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S016 <sup>3</sup>
19.5:1	(.293)	(48.2)	(.826)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S016 <sup>3</sup>
19.5:1	41.5	460	117 <sup>1</sup>	6.18	4.57	17	9.35	24	500 CPR	PE-9	GM8724S017 <sup>3</sup>
19.5:1	(.293)	(48.2)	(.826)	(0.044)	(0.044)	17	9.35	24	500 CPR	PE-9	GM8724S017 <sup>3</sup>
30.9:1	61	292	168 <sup>1</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S018 <sup>3</sup>
30.9:1	(.431)	(30.6)	(1.187)	(0.022)	(0.022)	4.33	2.34	12	None	PE-9	GM8724S018 <sup>3</sup>
30.9:1	61	292	168 <sup>1</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S019 <sup>3</sup>
30.9:1	(.431)	(30.6)	(1.187)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S019 <sup>3</sup>
60.5:1	113	150	328 <sup>1,2</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S020 <sup>3</sup>
60.5:1	(.798)	(15.7)	(2.317)	(0.044)	(0.044)	4.33	2.34	12	None	PE-9	GM8724S020 <sup>3</sup>
60.5:1	113	150	328 <sup>1,2</sup>	3.09	2.29	4.33	2.34	12	500 CPR	PE-9	GM8724S021 <sup>3</sup>
60.5:1	(.798)	(15.7)	(2.317)	(0.044)	(0.044)	4.33	2.34	12	500 CPR	PE-9	GM8724S021 <sup>3</sup>
60.5:1	113	150	328 <sup>1,2</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S022 <sup>3</sup>
60.5:1	(.798)	(15.7)	(2.317)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S022 <sup>3</sup>
60.5:1	113	150	328 <sup>1,2</sup>	6.18	4.57	17	9.35	24	500 CPR	PE-9	GM8724S023 <sup>3</sup>
60.5:1	(.798)	(15.7)	(2.317)	(0.044)	(0.044)	17	9.35	24	500 CPR	PE-9	GM8724S023 <sup>3</sup>
95.9:1	173	94	466 <sup>1,2</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S024 <sup>3</sup>
95.9:1	(1.222)	(9.8)	(3.291)	(0.022)	(0.022)	4.33	2.34	12	None	PE-9	GM8724S024 <sup>3</sup>
95.9:1	173	94	466 <sup>1,2</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S025 <sup>3</sup>
95.9:1	(1.222)	(9.8)	(3.291)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S025 <sup>3</sup>
187.7:1	175	48	911 <sup>1,2</sup>	3.09	2.29	4.33	2.34	12	None	PE-9	GM8724S026 <sup>3</sup>
187.7:1	(1.23)	(5.0)	(6.434)	(0.022)	(0.022)	4.33	2.34	12	None	PE-9	GM8724S026 <sup>3</sup>
187.7:1	175	48	911 <sup>1,2</sup>	3.09	2.29	4.33	2.34	12	500 CPR	PE-9	GM8724S027 <sup>3</sup>
187.7:1	(1.23)	(5.0)	(6.434)	(0.022)	(0.022)	4.33	2.34	12	500 CPR	PE-9	GM8724S027 <sup>3</sup>

**Series GM 8000 LO-COG® Brush Commutated DC Motors (continued)**

Reduction Ratio	Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
	oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω	mH	V			
187.7:1	175	48	911 <sup>1,2</sup>	6.18	4.57	17	9.35	24	None	PE-9	GM8724S028 <sup>3</sup>
187.7:1	(1.23)	(5.0)	(6.434)	(0.044)	(0.044)	17	9.35	24	None	PE-9	GM8724S028 <sup>3</sup>
187.7:1	175	48	911 <sup>1,2</sup>	6.18	4.57	17	9.35	24	500 CPR	PE-9	GM8724S029 <sup>3</sup>
187.7:1	(1.23)	(5.0)	(6.434)	(0.044)	(0.044)	17	9.35	24	500 CPR	PE-9	GM8724S029 <sup>3</sup>

**Series GM 9000 LO-COG® Brush Commutated DC Motors**

Reduction Ratio	Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
	oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω	mH	V			
11.5:1	61	424	304 <sup>1,2</sup>	3.29	2.43	1.26	1.02	12	None	PE-10	GM9234S016 <sup>3</sup>
11.5:1	(.431)	(44.4)	(2.147)	(0.023)	(0.023)	1.26	1.02	12	None	PE-10	GM9234S016 <sup>3</sup>
11.5:1	61	424	304 <sup>1,2</sup>	6.5	4.81	4.62	3.97	24	None	PE-10	GM9234S017 <sup>3</sup>
11.5:1	(.431)	(44.4)	(2.147)	(0.046)	(0.046)	4.62	3.97	24	None	PE-10	GM9234S017 <sup>3</sup>
38.3:1	187	911	911 <sup>1,2</sup>	3.29	2.43	1.26	1.02	12	None	PE-10	GM9234S022 <sup>3</sup>
38.3:1	(1.321)	(95.4)	(6.434)	(0.023)	(0.023)	1.26	1.02	12	None	PE-10	GM9234S022 <sup>3</sup>
38.3:1	187	911	911 <sup>1,2</sup>	6.5	4.81	4.62	3.97	24	None	PE-10	GM9234S023 <sup>3</sup>
38.3:1	(1.321)	(95.4)	(6.434)	(0.046)	(0.046)	4.62	3.97	24	None	PE-10	GM9234S023 <sup>3</sup>
127.8:1	500	36	2747 <sup>1,2</sup>	3.29	2.43	1.26	1.02	12	None	PE-10	GM9234S028 <sup>3</sup>
127.8:1	(3.51)	(3.8)	(19.401)	(0.023)	(0.023)	1.26	1.02	12	None	PE-10	GM9234S028 <sup>3</sup>
127.8:1	500	36	2747 <sup>1,2</sup>	6.5	4.81	4.62	3.97	24	None	PE-10	GM9234S029 <sup>3</sup>
127.8:1	(3.51)	(3.8)	(19.401)	(0.046)	(0.046)	4.62	3.97	24	None	PE-10	GM9234S029 <sup>3</sup>
218.4:1	500	21	4199 <sup>1,2</sup>	3.29	2.43	1.26	1.02	12	None	PE-10	GM9234S030 <sup>3</sup>
218.4:1	(3.51)	(2.2)	(29.655)	(0.023)	(0.023)	1.26	1.02	12	None	PE-10	GM9234S030 <sup>3</sup>
218.4:1	500	21	4199 <sup>1,2</sup>	3.29	2.43	1.26	1.02	12	500 CPR	PE-10	GM9234S031 <sup>3</sup>
218.4:1	(3.51)	(2.2)	(29.655)	(0.023)	(0.023)	1.26	1.02	12	500 CPR	PE-10	GM9234S031 <sup>3</sup>
218.4:1	500	21	4199 <sup>1,2</sup>	6.5	4.81	4.62	3.97	24	None	PE-10	GM9234S032 <sup>3</sup>
218.4:1	(3.51)	(2.2)	(29.655)	(0.046)	(0.046)	4.62	3.97	24	None	PE-10	GM9234S032 <sup>3</sup>
218.4:1	500	21	4199 <sup>1,2</sup>	6.5	4.81	4.62	3.97	24	500 CPR	PE-10	GM9234S033 <sup>3</sup>
218.4:1	(3.51)	(2.2)	(29.655)	(0.046)	(0.046)	4.62	3.97	24	500 CPR	PE-10	GM9234S033 <sup>3</sup>
5.9:1	48	790	286 <sup>1</sup>	3.25	2.4	0.71	0.66	12	None	PE-10	GM9236S012 <sup>3</sup>
5.9:1	(.339)	(82.7)	(2.02)	(0.023)	(0.023)	0.71	0.66	12	None	PE-10	GM9236S012 <sup>3</sup>
5.9:1	48	790	286 <sup>1</sup>	3.25	2.4	0.71	0.66	12	500 CPR	PE-10	GM9236S013 <sup>3</sup>
5.9:1	(.339)	(82.7)	(2.02)	(0.023)	(0.023)	0.71	0.66	12	500 CPR	PE-10	GM9236S013 <sup>3</sup>
5.9:1	48	790	286 <sup>1</sup>	6.49	4.8	2.49	2.63	24	None	PE-10	GM9236S014 <sup>3</sup>
5.9:1	(.339)	(82.7)	(2.02)	(0.046)	(0.046)	2.49	2.63	24	None	PE-10	GM9236S014 <sup>3</sup>
5.9:1	48	790	286 <sup>1</sup>	6.49	4.8	2.49	2.63	24	500 CPR	PE-10	GM9236S015 <sup>3</sup>
5.9:1	(.339)	(82.7)	(2.02)	(0.046)	(0.046)	2.49	2.63	24	500 CPR	PE-10	GM9236S015 <sup>3</sup>
19.7:1	153	236	860 <sup>1,2</sup>	3.25	2.4	0.71	0.66	12	None	PE-10	GM9236S018 <sup>3</sup>
19.7:1	(1.081)	(24.7)	(6.074)	(0.023)	(0.023)	0.71	0.66	12	None	PE-10	GM9236S018 <sup>3</sup>

<sup>1</sup>Caution: Peak Torque (Stall) is provided for the purpose of performance calculations only. Operation near, or at, a stalled condition will result in motor and/or gearhead damage.

<sup>2</sup>Caution: The gearhead will be damaged when operating at the Peak Torque.

<sup>3</sup>Unit supplied with ball bearing output shaft.

Note: All speed and torque ratings are specified at the Rated Voltage. Winding Voltage is shown for reference only.

For winding characteristics of a specific Model and Winding Voltage, refer to the appropriate catalog data sheet.

Note: All encoders supplied with 20" lead wires.

Please contact your Pittman sales representative or the factory application engineering group for specific recommendations regarding gearmotor applications.

**Series GM 9000 LO-COG® Brush Commutated DC Motors (continued)**

Reduction Ratio	Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
	oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω	mH	V			
19.7:1	153	236	860 <sup>1,2</sup>	3.25	2.4	0.71	0.66	12	500 CPR	PE-10	GM9236S019 <sup>3</sup>
19.7:1	(1.081)	(24.7)	(6.074)	(0.023)	(0.023)	0.71	0.66	12	500 CPR	PE-10	GM9236S019 <sup>3</sup>
19.7:1	153	236	860 <sup>1,2</sup>	6.49	4.8	2.49	2.63	24	None	PE-10	GM9236S020 <sup>3</sup>
19.7:1	(1.081)	(24.7)	(6.074)	(0.046)	(0.046)	2.49	2.63	24	None	PE-10	GM9236S020 <sup>3</sup>
19.7:1	153	236	860 <sup>1,2</sup>	6.49	4.8	2.49	2.63	24	500 CPR	PE-10	GM9236S021 <sup>3</sup>
19.7:1	(1.081)	(24.7)	(6.074)	(0.046)	(0.046)	2.49	2.63	24	500 CPR	PE-10	GM9236S021 <sup>3</sup>
65.5:1	480	71	2585 <sup>1,2</sup>	3.25	2.4	0.71	0.66	12	None	PE-10	GM9236S024 <sup>3</sup>
65.5:1	(3.39)	(7.4)	(18.257)	(0.023)	(0.023)	0.71	0.66	12	None	PE-10	GM9236S024 <sup>3</sup>
65.5:1	480	71	2585 <sup>1,2</sup>	3.25	2.4	0.71	0.66	12	500 CPR	PE-10	GM9236S025 <sup>3</sup>
65.5:1	(3.39)	(7.4)	(18.257)	(0.023)	(0.023)	0.71	0.66	12	500 CPR	PE-10	GM9236S025 <sup>3</sup>
65.5:1	480	71	2585 <sup>1,2</sup>	6.49	4.8	2.49	2.63	24	None	PE-10	GM9236S026 <sup>3</sup>
65.5:1	(3.39)	(7.4)	(18.257)	(0.046)	(0.046)	2.49	2.63	24	None	PE-10	GM9236S026 <sup>3</sup>
65.5:1	480	71	2585 <sup>1,2</sup>	6.49	4.8	2.49	2.63	24	500 CPR	PE-10	GM9236S027 <sup>3</sup>
65.5:1	(3.39)	(7.4)	(18.257)	(0.046)	(0.046)	2.49	2.63	24	500 CPR	PE-10	GM9236S027 <sup>3</sup>
5.9:1	15	474	36 <sup>1</sup>	5.6	4.14	8.33	6.17	12	None	PE-10	GM9413-1
5.9:1	(.106)	(49.6)	(.254)	(0.040)	(0.040)	8.33	6.17	12	None	PE-10	GM9413-1
19.7:1	45	142	109 <sup>1</sup>	5.6	4.14	8.33	6.17	12	None	PE-10	GM9413-2
19.7:1	(.318)	(14.9)	(.770)	(0.040)	(0.040)	8.33	6.17	12	None	PE-10	GM9413-2
65.5:1	136	43	326 <sup>1,2</sup>	5.6	4.14	8.33	6.17	12	None	PE-10	GM9413-3
65.5:1	(.961)	(4.5)	(2.302)	(0.040)	(0.040)	8.33	6.17	12	None	PE-10	GM9413-3
218.4:1	175	13	973 <sup>1,2</sup>	5.6	4.14	8.33	6.17	12	None	PE-10	GM9413-4
218.4:1	(1.24)	(1.4)	(6.872)	(0.040)	(0.040)	8.33	6.17	12	None	PE-10	GM9413-4
728.0:1	175	4	2913 <sup>1,2</sup>	5.6	4.14	8.33	6.17	12	None	PE-10	GM9413-5
728.0:1	(1.24)	(0.4)	(20.573)	(0.040)	(0.040)	8.33	6.17	12	None	PE-10	GM9413-5
24.0:1	95	256	634 <sup>1</sup>	5.17	3.82	2.96	2.51	24	100 CPR	*	GM9634S001 <sup>3</sup>
24.0:1	(.670)	(26.8)	(4.477)	(0.037)	(0.037)	2.96	2.51	24	100 CPR	*	GM9634S001 <sup>3</sup>
75.0:1	265	82	1580 <sup>1</sup>	5.17	3.82	2.96	2.51	24	None	*	GM9634S002 <sup>3</sup>
75.0:1	(1.87)	(8.6)	(11.159)	(0.037)	(0.037)	2.96	2.51	24	None	*	GM9634S002 <sup>3</sup>
144.0:1	500	43	3033 <sup>1,2</sup>	5.17	3.82	2.96	2.51	24	None	*	GM9634S003 <sup>3</sup>
144.0:1	(3.51)	(4.5)	(21.421)	(0.037)	(0.037)	2.96	2.51	24	None	*	GM9634S003 <sup>3</sup>

**Series GM 14000 LO-COG® Brush Commutated DC Motors**

Reduction Ratio	Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
	oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω	mH	V			
24.0:1	420	154	3133 <sup>1,2</sup>	8.67	6.41	1.01	1.6	24	100 CPR	*	GM14604S001
24.0:1	(2.97)	(16.1)	(22.1)	(0.061)	(0.061)	1.01	1.6	24	100 CPR	*	GM14604S001
75.0:1	1125	49	7803 <sup>1,2</sup>	8.67	6.41	1.01	1.6	24	None	*	GM14604S002
75.0:1	(7.95)	(5.1)	(55.1)	(0.061)	(0.061)	1.01	1.6	24	None	*	GM14604S002
65.5:1	500	59	4625 <sup>1,2</sup>	3.9	2.88	0.45	0.63	12	None	PE-11	GM14902S017
65.5:1	(3.53)	(6.2)	(32.7)	(0.030)	(0.030)	0.45	0.63	12	None	PE-11	GM14902S017
65.5:1	500	59	4625 <sup>1,2</sup>	3.9	2.88	0.45	0.63	12	500 CPR	PE-11	GM14902S018
65.5:1	(3.53)	(6.2)	(32.7)	(0.030)	(0.030)	0.45	0.63	12	500 CPR	PE-11	GM14902S018
65.5:1	500	59	4625 <sup>1,2</sup>	7.8	5.77	1.73	2.54	24	None	PE-11	GM14902S019
65.5:1	(3.53)	(6.2)	(32.7)	(0.055)	(0.055)	1.73	2.54	24	None	PE-11	GM14902S019
65.5:1	500	59	4625 <sup>1,2</sup>	7.8	5.77	1.73	2.54	24	500 CPR	PE-11	GM14902S020
65.5:1	(3.53)	(6.2)	(32.7)	(0.055)	(0.055)	1.73	2.54	24	500 CPR	PE-11	GM14902S020
5.9:1	124	597	975 <sup>1,2</sup>	4.33	3.21	0.27	0.4	12	None	PE-11	GM14904S009
5.9:1	(.876)	(62.5)	(6.89)	(0.031)	(0.031)	0.27	0.4	12	None	PE-11	GM14904S009

\* Planetary gearhead drawings available upon request.



**Series GM 14000 LO-COG® Brush Commutated DC Motors (continued)**

Reduction Ratio	Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
	oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω	mH	V			
5.9:1	124	597	975 <sup>1,2</sup>	4.33	3.21	0.27	0.4	12	500 CPR	PE-11	GM14904S010 <sup>3</sup>
5.9:1	(.876)	(62.5)	(6.89)	(0.031)	(0.031)	0.27	0.4	12	500 CPR	PE-11	GM14904S010 <sup>3</sup>
5.9:1	124	597	975 <sup>1,2</sup>	8.67	6.41	1.01	1.6	24	None	PE-11	GM14904S011 <sup>3</sup>
5.9:1	(.876)	(62.5)	(6.89)	(0.061)	(0.061)	1.01	1.6	24	None	PE-11	GM14904S011 <sup>3</sup>
5.9:1	124	597	975 <sup>1,2</sup>	8.67	6.41	1.01	1.6	24	500 CPR	PE-11	GM14904S012 <sup>3</sup>
5.9:1	(.876)	(62.5)	(6.89)	(0.061)	(0.061)	1.01	1.6	24	500 CPR	PE-11	GM14904S012 <sup>3</sup>
19.7:1	374	179	2934 <sup>1,2</sup>	4.33	3.21	0.27	0.4	12	None	PE-11	GM14904S013 <sup>3</sup>
19.7:1	(2.64)	(18.7)	(20.72)	(0.031)	(0.031)	0.27	0.4	12	None	PE-11	GM14904S013 <sup>3</sup>
19.7:1	374	179	2934 <sup>1,2</sup>	4.33	3.21	0.27	0.4	12	500 CPR	PE-11	GM14904S014 <sup>3</sup>
19.7:1	(2.64)	(18.7)	(20.72)	(0.031)	(0.031)	0.27	0.4	12	500 CPR	PE-11	GM14904S014 <sup>3</sup>
19.7:1	374	179	2934 <sup>1,2</sup>	8.67	6.41	1.01	1.6	24	None	PE-11	GM14904S015 <sup>3</sup>
19.7:1	(2.64)	(18.7)	(20.72)	(0.061)	(0.061)	1.01	1.6	24	None	PE-11	GM14904S015 <sup>3</sup>
19.7:1	374	179	2934 <sup>1,2</sup>	8.67	6.41	1.01	1.6	24	500 CPR	PE-11	GM14904S016 <sup>3</sup>
19.7:1	(2.64)	(18.7)	(20.72)	(0.061)	(0.061)	1.01	1.6	24	500 CPR	PE-11	GM14904S016 <sup>3</sup>

<sup>1</sup>Caution: Peak Torque (Stall) is provided for the purpose of performance calculations only. Operation near, or at, a stalled condition will result in motor and/or gearhead damage.

<sup>2</sup>Caution: The gearhead will be damaged when operating at the Peak Torque.

<sup>3</sup>Unit supplied with ball bearing output shaft.


Note: All speed and torque ratings are specified at the Rated Voltage. Winding Voltage is shown for reference only.

For winding characteristics of a specific Model and Winding Voltage, refer to the appropriate catalog data sheet.

Note: All encoders supplied with 20" lead wires.

Please contact your Pittman sales representative or the factory application engineering group for specific recommendations regarding gearmotor applications.

**Series GM 8000 LO-COG® Brush Commutated DC Motors**

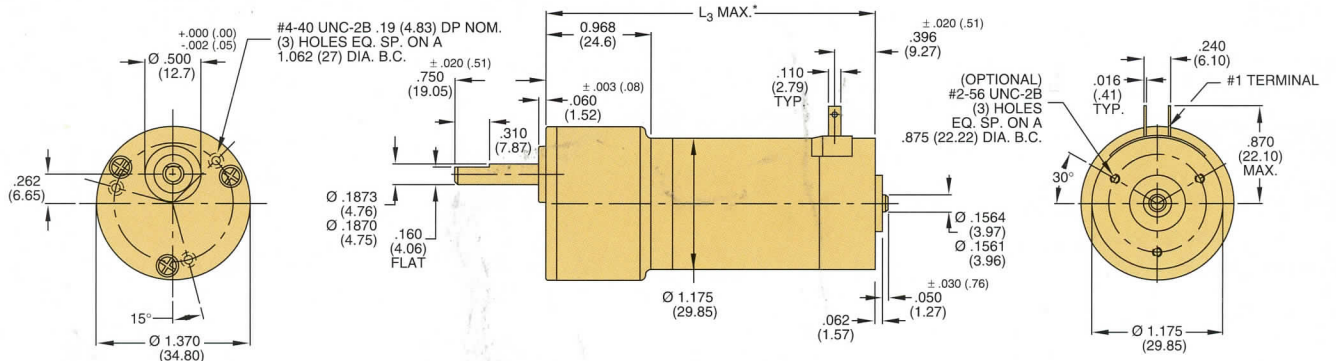

**With 91X0 Encoder**


**Encoder Connection Chart**

Pin No.	Color	Connection
1	Black	Ground
2	Green	Index/NC
3	Yellow	Channel A
4	Red	Vcc
5	Blue	Channel B

Notes:

- Unless otherwise specified, all tolerances are to be ±.005 (.01)
- All measurements are in inches (mm)


\*See line number 16 in motor data chart

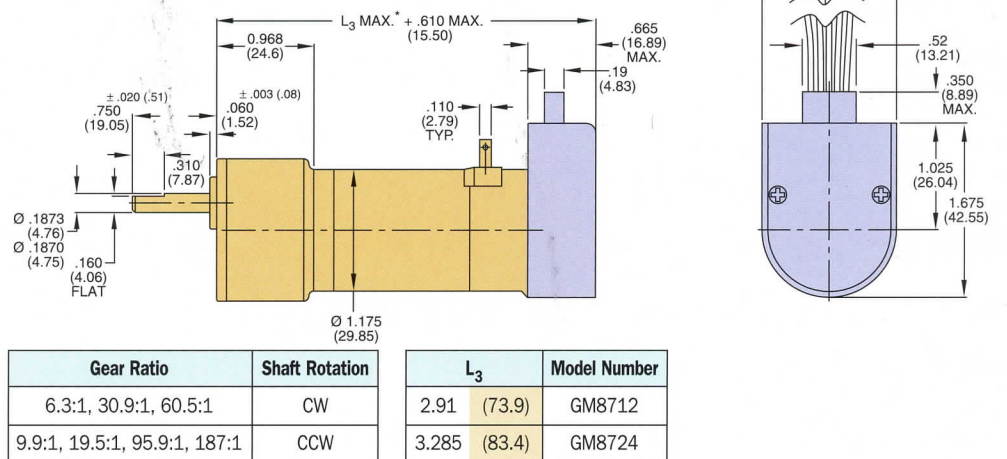

Gear Ratio	Shaft Rotation	L <sub>3</sub>	Model Number
6.3:1, 30.9:1, 60.5:1	CW	2.91 (73.9)	GM8712
9.9:1, 19.5:1, 95.9:1, 187:1	CCW	3.285 (83.4)	GM8724




**Series GM 9000 LO-COG® Brush Commutated DC Motors**

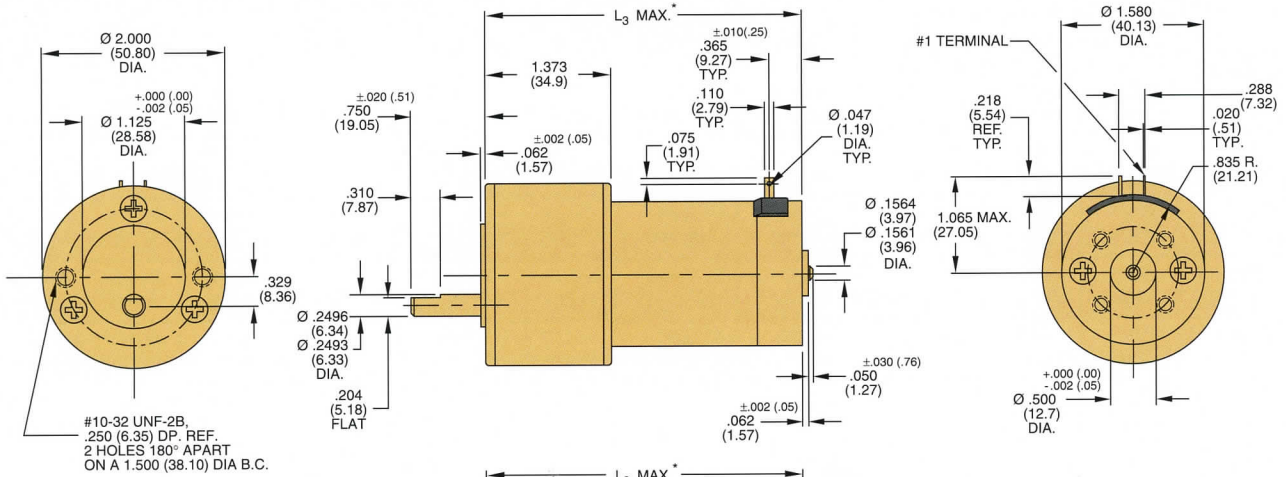

#10-32 UNF-2B  
.250 (6.35) DP. REF.  
2 HOLES 180° APART  
ON A 1.500 (38.10) DIA B.C.

**With 91X0 Encoder**


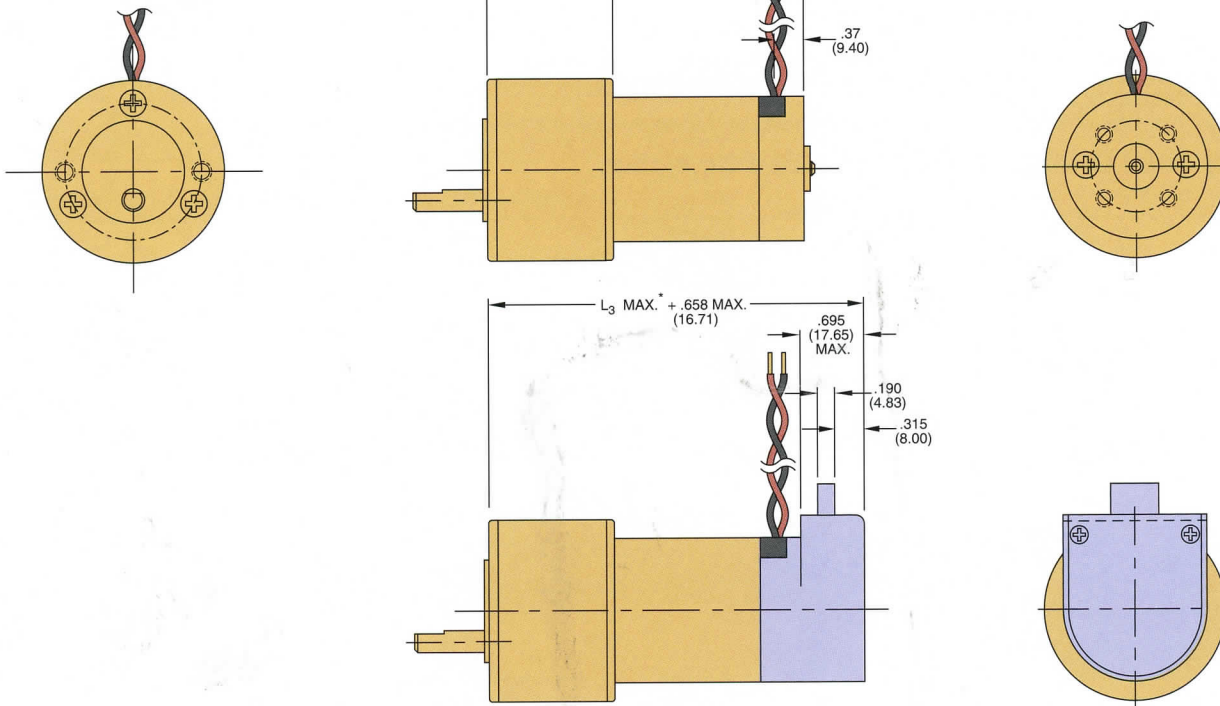


STANDARD LEAD WIRES  
22 AWG, (7X30),  
UL STYLE 1007/1569  
18" (457) RED & BLACK


$L_3$	Model Number
3.676 (93.4)	GM9234
4.326 (109.9)	GM9236
3.476 (88.3)	GM9413

Gear Ratio	Shaft Rotation
5.9:1, 11.5:1, 65.5:1, 127.8:1	CW
19.7:1, 38.3:1, 218.4:1	CCW

**Series GM 14000 LO-COG® Brush Commutated DC Motors**

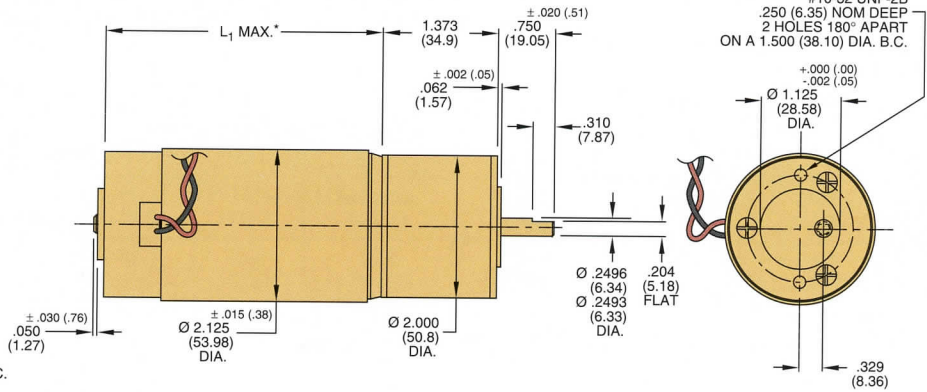

**With 91X0 Encoder**

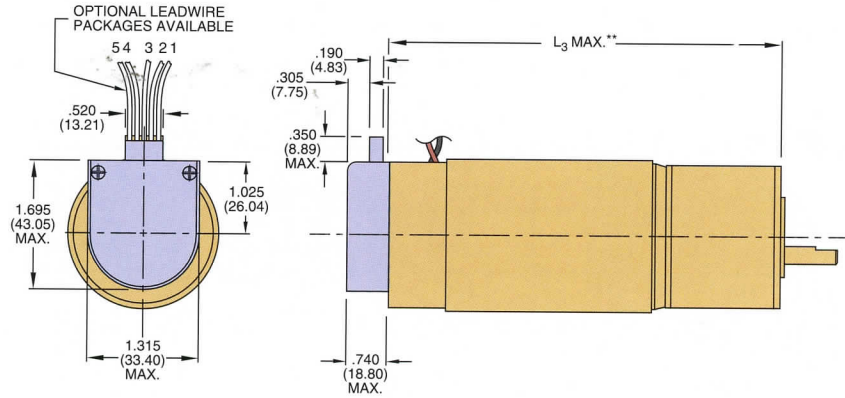

**Gearmotor Only**

$L_1$	Model Number
3.203 (81.4)	GM14902
4.078 (103.6)	GM14904

**Gearmotor with Encoder**

$L_3$	Model Number
4.322 (109.8)	GM14902
4.572 (116.1)	GM14904

Gear Ratio	Shaft Rotation
5.9:1, 65.1:1	CW
19.7:1	CCW

**Encoder Connection Chart**

Pin No.	Color	Connection
1	Black	Ground
2	Green	Index/NC
3	Yellow	Channel A
4	Red	Vcc
5	Blue	Channel B

**Notes:**

- Unless otherwise specified, all tolerances are to be  $\pm 0.05$  (.01)
- All measurements are in inches (mm)
- \*See line number 16 in motor data chart

**ELCOM SL™ Brushless DC Motors**

Maximum Continuous Torque	No-Load Speed	Peak Torque (Stall)	Torque Constant	Back EMF Constant	Resistance	Inductance	Rated Voltage	Encoder	Outline Drawing Page Number	Part Number
oz-in (N-m)	rpm (rad/s)	oz-in (N-m)	oz-in/A (N-m/A)	V/krpm (V/rad/s)	Ω Ω	mH mH	V V			
4.11 (0.29)	7150 (748.7)	13.3 (.094)	4.47 (0.032)	3.31 (0.032)	7.9 7.9	0.7 0.7	24 24	500 CPR 500 CPR	PE-13 PE-13	3441S002-R2 3441S002-R2
5.78 (.041)	7400 (774.9)	26.2 (.185)	3.44 (0.024)	2.54 (0.024)	2.67 2.67	0.29 0.29	19.1 19.1	500 CPR 500 CPR	PE-13 PE-13	3442S003-R2 3442S003-R2
5.78 (.041)	7400 (774.9)	26.2 (.185)	6.88 (0.049)	5.09 (0.049)	9.32 9.32	1.16 1.16	38.2 38.2	500 CPR 500 CPR	PE-13 PE-13	3442S004-R2 3442S004-R2
11.9 (.084)	5780 (605.3)	71.2 (.503)	3.53 (0.025)	2.61 (0.025)	0.75 0.75	0.14 0.14	15.1 15.1	500 CPR 500 CPR	PE-13 PE-13	4441S009 4441S009
11.9 (.084)	5780 (605.3)	71.2 (.503)	7.05 (0.050)	5.21 (0.050)	3 0.75	0.54 0.14	30.3 15.1	500 CPR 500 CPR	PE-13 PE-13	4441S010 4441S010
14.3 (.101)	5925 (620.5)	100.2 (.708)	4.33 (0.031)	3.2 (0.031)	0.82 0.82	0.16 0.16	19.1 19.1	500 CPR 500 CPR	PE-13 PE-13	4442S011 4442S011
14.3 (.101)	5925 (620.5)	100.2 (.708)	8.67 (0.061)	6.41 (0.061)	3.3 3.3	0.64 0.64	38.2 38.2	500 CPR 500 CPR	PE-13 PE-13	4442S012 4442S012
19.1 (.135)	5860 (613.7)	149 (1.05)	5.55 (0.039)	4.1 (0.039)	0.89 0.89	0.19 0.19	24 24	500 CPR 500 CPR	PE-13 PE-13	4443S013 4443S013
19.1 (.135)	5860 (613.7)	149 (1.05)	11.1 (0.078)	8.21 (0.078)	3.58 3.58	0.74 0.74	48 48	500 CPR 500 CPR	PE-13 PE-13	4443S014 4443S014
25 (.177)	5025 (526.2)	171 (1.21)	2.96 (0.021)	2.19 (0.021)	0.25 0.25	0.06 0.06	12 12	500 CPR 500 CPR	PE-13 PE-13	5441S005 5441S005
25 (.177)	5025 (526.2)	171 (1.21)	6.46 (0.046)	4.77 (0.046)	0.88 0.88	0.27 0.27	24 24	500 CPR 500 CPR	PE-13 PE-13	5441S006 5441S006

Note: All encoders supplied with 20" lead wires.

**3-Phase Motor Connection Chart**

Function	Wire Color
Phase A	Brown
Phase B	Red
Phase C	Orange
Sensor 1	Grey
Sensor 2	Blue
Sensor 3	White
Hall Sensor Power	Violet
Hall Sensor Power Return	Black


**Encoder Connection Chart**

Pin No.	Color	Connection
1	Black	Ground
2	Green	Index/NC
3	Yellow	Channel A
4	Red	Vcc
5	Blue	Channel B


Notes:

- Unless otherwise specified, all tolerances are to be ±.005 (.01)
- All measurements are in inches (mm)
- \*See line number 16 in motor data chart


**Series 3400 ELCOM SL™ Brushless DC Motor with Encoder**

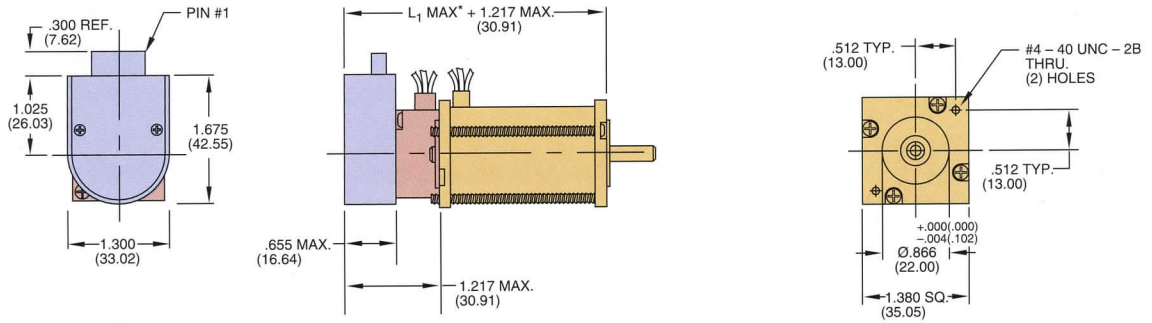

**Series 4400 ELCOM SL™ Brushless DC Motor with Encoder**

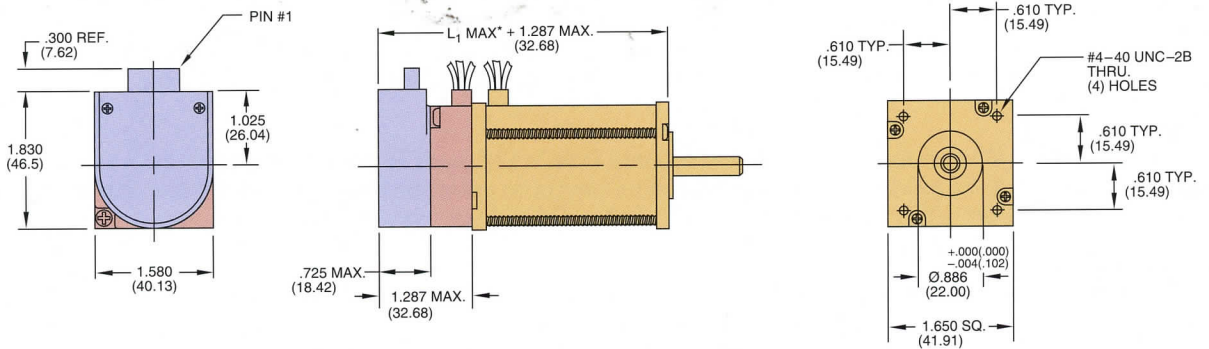

**Series 5400 ELCOM SL™ Brushless DC Motor with Encoder**

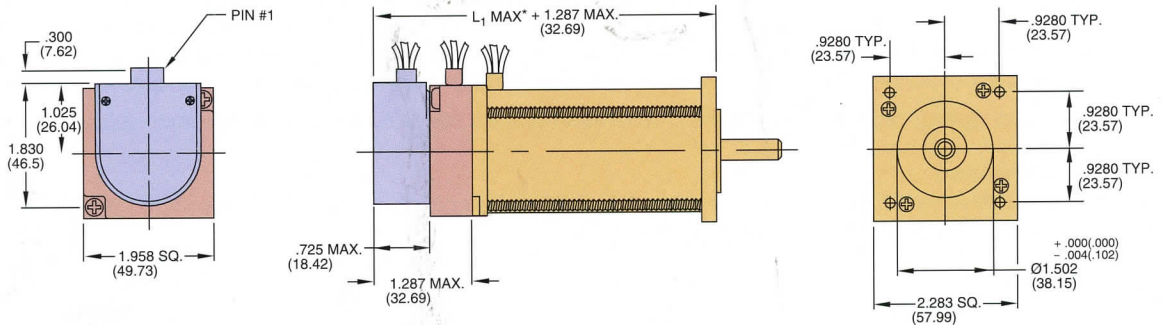

$L_1$	Model Number
1.76 (44.7)	3441
2.16 (54.9)	3442
2.093 (53.2)	4441
2.393 (60.8)	4442
2.693 (68.4)	4443
2.603 (66.1)	5441

**Terms and Conditions of Sale****1. Payment:**

Net payment is to be made within 30 days from the date of invoice if open terms are extended. Purchaser's credit will be established at time of order and if other than open credit is extended by the Pittman Division, hereinafter called Pittman, purchaser will be so notified.

**2. Price, Transportation (Insurance) and Taxes:**

All prices are F.O.B. Harleysville, PA. The price does not include other charges, such as transportation charges, insurance charges, any present or future sales, use, occupation or other tax which may be imposed on this transaction, all of which shall be paid by the Purchaser. Shipments will not be insured unless specifically requested on the Purchaser's order.

**3. Cancellation:**

Unless Pittman receives notification otherwise within 5 days after receipt hereof by Purchaser, these terms and conditions shall be conclusively presumed to be accepted by Purchaser and thereafter no cancellation of order shall be effective without the consent of Pittman: Except — (a) cancellations of reasonable-size orders of Stock Products may be accepted at the discretion of Pittman before they are shipped to the Purchaser, without any charge to the Purchaser, (b) if the order is for Special Products, i.e., products other than those listed in Pittman's current catalog, the Purchaser will be liable for a cancellation charge equal to the purchase price or, as solely determined by Pittman, to a lesser charge, depending on degree of completion of order and expenses or liabilities incurred by Pittman to the day the cancellation notice is received plus a profit of 15% thereof, and (c) if order is accompanied by a notice that products required are for performance of a contract with the United States, or an agency thereof, containing a standard termination clause, the provisions of such termination clause most favorable to Pittman shall be applicable to this order.

**4. Delivery:**

Pittman will make every effort to maintain a promised shipping date, but because of many factors beyond our reasonable control, the promised shipping date is not guaranteed. Pittman accepts no liability for penalties or damages for delayed shipments, if any. Claims must be received by Pittman within 10 days of receipt of the shipment by Purchaser for consideration.

**5. Return of Products:**

Permission must be obtained from Pittman before any products are returned. If return of products is made necessary through any fault of ours, and permission is granted for its return, we will give full credit, including all transportation charges. If return is due to no fault of ours, and granted, credit less a service charge of 15%, minimum charge \$100.00 on accepted pieces, will be issued when product has been returned, transportation prepaid, counted, inspected and found to be in salable condition by Pittman.

**6. Warranty:**

Pittman makes no warranty, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose, with regard to any of its products except that as to its Catalog Standard Products they shall substantially conform to the specifications thereof listed in Pittman's current catalog at the time the order is accepted by Pittman and as to its Special Products that they shall substantially conform to the specifications agreed upon in writing with Purchaser at the time of acceptance of the order. Pittman warrants product against defects in material and workmanship for a period of one year from manufactured date.

**7. Technical or Other Assistance:**

Any information or assistance which may be given by Pittman to Purchaser is based on our experience and judgment, but no warranty, expressed or implied, is made as to the information or assistance.

**8. Title to Merchandise:**

Title to products passes to Purchaser upon our delivery thereof to carrier at shipping point, Purchaser thereafter assuming all risks of ownership.

**9. Patent Infringement:**

To extent that products delivered hereunder are not manufactured pursuant to designs or specifications furnished by Purchaser, Pittman agrees that it will defend at its own expense any suit brought against Purchaser in which infringement by products delivered hereunder of any United States Letters Patent is alleged and will indemnify Purchaser, its officers, agents and employees against liability, including costs, for infringement of any such Letters Patent, provided that Purchaser delivers promptly to Pittman all notices of the suit or action alleging such infringement and authorizes Pittman to conduct the defense and/or settlement thereof to a final conclusion. The foregoing indemnification shall not apply to infringement arising from the use or sale of a product delivered hereunder in combination with another product not delivered hereunder where infringement would not have occurred from the use or sale of the product delivered hereunder solely for the purpose for which it was designed. In no event will Pittman be liable for consequential, incidental or special damages even if Pittman has been advised of the possibility of such damages.

**10. General:**

These terms and conditions shall constitute an integral part of the contract for the products covered hereby, which contract shall be governed by the laws of Pennsylvania. No waiver, alteration or modification of any of these provisions shall be valid unless made in writing and signed by an authorized officer of the Pittman Division.

**PITTMAN®**



Specifications subject to change without notice.



PE-16

**PITTMAN**<sup>®</sup>

343 GODSHALL DRIVE  
HARLEYSVILLE, PENNSYLVANIA 19438 U.S.A.  
PHONE: 215-256-6601 • FAX: 215-256-1338  
TOLL FREE: 877-PITTMAN (USA Only)  
E-MAIL: [info@pittmannel.com](mailto:info@pittmannel.com)  
WEB SITE: [www.pittmannel.com](http://www.pittmannel.com)

11/99