

9107

69 - 0504



16 Section

PULLMAN

Plan Scale: 1/8" = 1'

ALL NATION LINE
23W546 St. Charles Rd.



* = Super details parts
(or) optional accessories.





Over 370 cars were built. Most of these were converted into tourist cars in the 1930's. At that time the car name was dropped and a number was given to the car. The cars were numbered either as shown or with the word TOURIST over the

number centered on the car-side where the name would normally be. The tourist number series was 4000's, 4100's, and 4200's. Some appropriate names are: Dellwood, Racine, Dalebrook, Wellgate, and Lincoln.

ALL NATION LINE
23 W 546 ST. CHARLES RD.
WHEATON, IL 60188

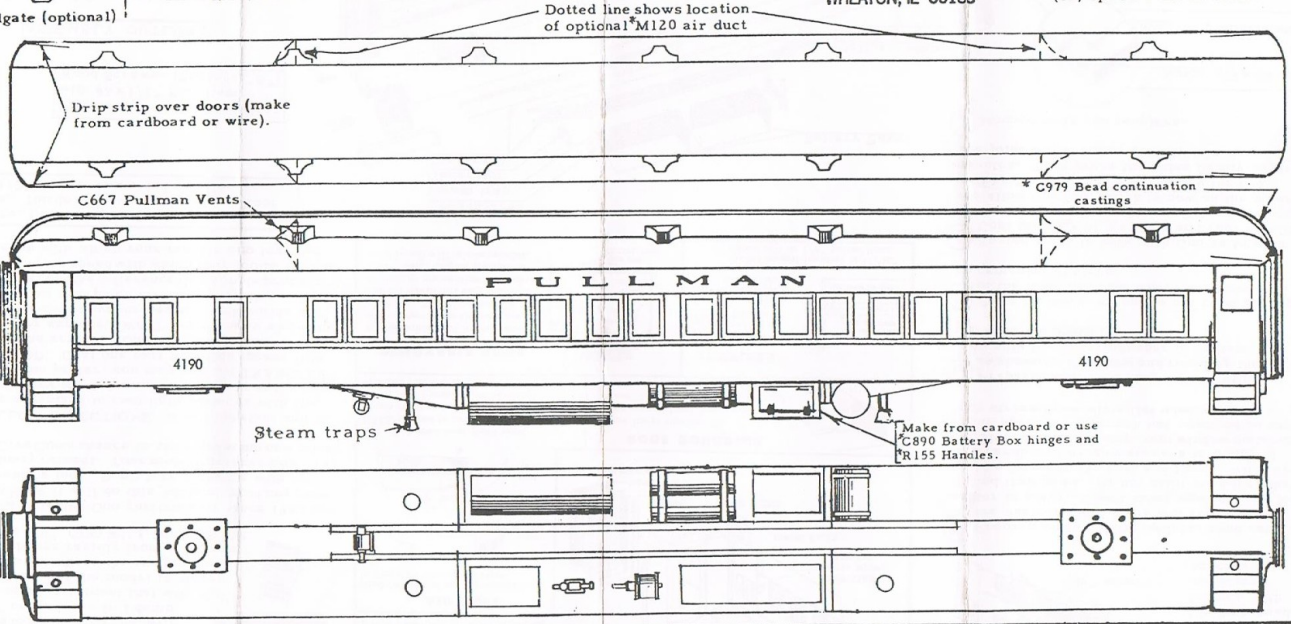

Underframe Assembly Detail

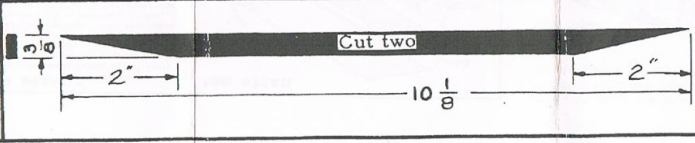

IMPORTANT

Truck centers shown are average. Verify position with trucks to be used (allow for steps) before cutting centersill parts.

Mount couplers on a pad of 3/32" centersill stock. Proper coupler height (center) is 11/16" above rail or 1/4" below floor.

HEY, HERE'S SOMETHING NEW!

One of the really new features of this kit is the method of cementing the sides to the body. BUT, you need a cement that will hold wood to metal: one that will NOT come loose in a damp basement, a cement that will NOT crack even if the model is stored in an attic where the temperature may change rapidly from sub-zero to plus 120°. **GOO WILL DO THIS JOB.**



We have tested Goo continuously since 1949 and we KNOW it will do this job (and many other cementing jobs). Don't take a chance with an ordinary cement. Your models deserve Goo. Try it. Give Goo a chance to show you some new tricks.


FOLLOW DIRECTIONS. It is important and to your advantage to coat both surfaces with Goo and let dry for 2-3 minutes as it says on the tube. Or, if you prefer, you may use the TRANSFER METHOD. Coat one part with Goo, press into place and remove. Goo has now "transferred" to the other surface. WAIT 2-3 minutes while the excess solvent evaporates and tack builds up, then press into place for final assembly. You'll be amazed at the difference this simple procedure makes in the speed with which your joints set and the ease with which your models Goo together.

Sides, floor, and roof are all cut to exact size. You do not have to trim them. Roof is 1/2" longer than sides and floor.

Fasten ends to roof and floor with #2 x 1/2" Flat Head Wood Screws. (See inset "B")

ASSEMBLY OUTLINE

- A** Clean flash from end castings. Fasten optional super detail parts to ends if desired. (See note on "Super Details".)
- B** Fasten ends to floor and roof with screws and Goo (inset "B"). Follow directions on Goo tube for quickest bond.
- C** Notch floor to provide clearance for vestibule door and step (see inset "C").
- D** Locate truck centers for the trucks you will use and Goo the diecast body bolsters in place. Cut centersill parts from wood and assemble on floor, reinforcing the fishbelly sections with pins. Be sure the



Make tank straps from flat wire or 1/16" strips of cardboard or sticky tape.


Sides snap inside the lip on the ends.

Mount trucks with #4 x 3/4" Round head wood screws.

IMPORTANT: These General Instructions show the body assembly of any car of this type. Car plans on the reverse will show where to locate all detail parts.


SUPER DETAILS To keep basic kit cost low, we packed superdetail parts (marked "S" or "optional") in a separate kit. Included are hand rails, grab irons, prism windows, guard chain, tailgates, box cover detail, roof bead castings. Also available are accessories such as interiors, lights, markers, air conditioners to make your car a real show piece. Consult catalog.

AIR DUCT Used on roof of air conditioned car in place of individual vents.



Cut off shaded area (both ends) CAREFUL not to break feather edge. Shape front or top surface, sand smooth. Fit to roof (remove roof beading). See end illustration for finished view.

END DETAIL

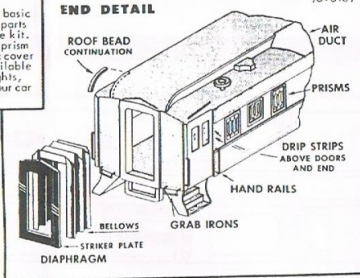


ROOF ROUNDING

Shape lower monitor (L) Make curved bead from stripwood (or use *C979 cast bead). Fit to roof. Shape upper monitor (U) to match bead.


REMOVABLE ROOF

A removable roof is desirable when interiors or lighting are planned. *U750 removable roof kit makes this easy, provides electrical connection to trucks. *R276 metal angles (cemented or soldered) will reinforce sides.




COUPLERS

Mount couplers on 3/32" pad with #2 x 3/8 screw. For short radius curves, increase 1/2" dimension.



E Complete the underbody details with Goo. Standard and optional superdetail parts, scaling any needed dimensions from the plan.




F Prepare sides. If the optional hand rails are desired, drill holes and cement or solder in place. Check sides against body for fit and then paint. Do not paint the edges that will be Gooed to the roof and floor. When dry, Goo cardboard window spacers to inside of car side, then Goo transparent window material to the spacers. (Spacers not required on cars with streamlined-style flat windows.)

G Prepare roof, installing details with Goo as shown on the plans and rounding the ends with file and sandpaper to contour shown in the drawings.

H Paint the body, except do not paint the edge of the floor and roof where the sides will be cemented in place.

I Fasten sides to body with Goo as follows: Coat the edge of the floor and roof with Goo and press the sides in place. Remove the sides and allow the Goo, which is now on the sides as well as the floor and roof, to dry for two minutes. Then press the sides firmly in place. The joint will set very quickly this way.

J Mount trucks and couplers.



Vestibule End

Mount couplers with #2 x 3/8 round head wood screws. Three #2 x 1/2 FHWS will be covered by Diaphragm.

COACH-PULLMAN ASSEMBLY 0
Milwaukee 59-0